

ELIMINOSTAT

Models according to electrode dimensions

Model	Image
CABX350	
CABX600	
CABX850	
CABX1100	
CABX1350	
CABX1600	
CABX1850	
CABX2100	
CABX2350	
CABX2600	
CABX2850	
CABX3100	

★ Please state the length of the electric pole and type of emitter needle required, along with the product model when placing your order with Shishido Electrostatic.

CABX□□□□-□□

Length and nozzle type

- Lengths are 350-3100mm (250mm pitch)
- Nozzle flow H or L
- Emitter needle material W, S or G

Examples


Length 1850mm, high flow tungsten emitter needle: CABX1850-HW

Length 600mm, low-flow silicon emitter needle: CABX600-LS


Lengths	Weights
350mm	450g
600mm	650g
850mm	860g
1100mm	1060g
1350mm	1260g
1600mm	1470g
1850mm	1670g
2100mm	1880g
2350mm	2080g
2600mm	2290g
2850mm	2500g
3100mm	2710g

Static Elimination Features

CABX850mm, air pressure: 0.3 MPa

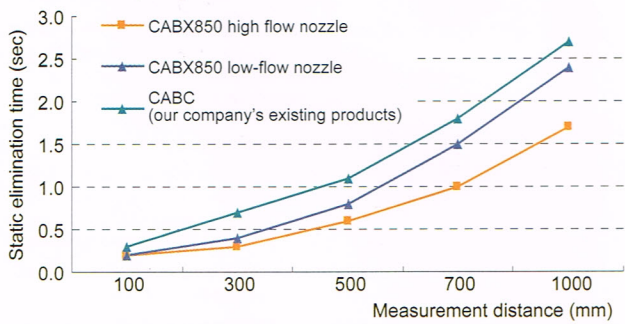

CABX850mm, air pressure: 0.5 MPa

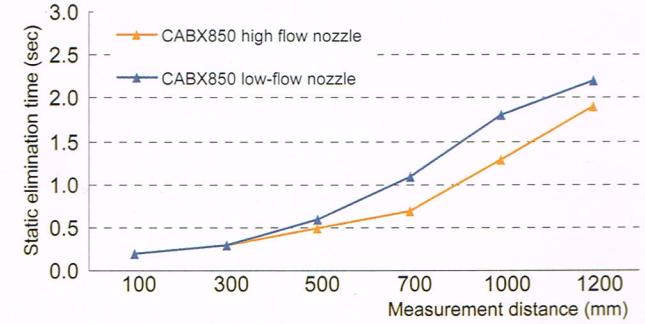

Measurement distance (mm)	100	300	500	700	1000
CABX high flow nozzle	0.2	0.3	0.6	1.0	1.7
CABX low-flow nozzle	0.2	0.4	0.8	1.5	2.4
CABX (our company's existing products)	0.3	0.7	1.1	1.8	2.7

Measurement distance (mm)	300	100	500	700	1000	1200
CABX high flow nozzle	0.3	0.2	0.5	0.7	1.3	1.9
CABX low-flow nozzle	0.3	0.2	0.6	1.1	1.8	2.2

Running Data

